

AN UPGRADE THAT WILL

TRANSFORM YOUR SPACE



**TOTALIS**






Tested hai. Trusted hai.



**"Totalis – Tested Hai, Trusted Hai"** comes from one of the most trusted companies and one of the largest aluminium producers in the world – Hindalco Industries Limited. Hindalco, the world's largest recycler, is the flagship metals company of the Aditya Birla Group.

### Tested and Certified

Totalis Windows are tested and certified as per global standards to give superior protection from:

-  Cyclonic winds
-  Heaviest of rains
-  Extreme loud noises
-  Dust
-  Air leakage

### Emblem of Authenticity

Totalis windows and doors come with a hologram serving as a distinctive mark of genuiness.

### Engineered by Experts

Totalis windows and doors are engineered and designed by a team of experts and are made up of:



High Quality Aluminium for Strength and Durability



Superior Quality Rollers for Hassle Free Operations & Long Life




Superior Quality Locks for Safety and High Performance




Multiple Hinges Options for Doors and Windows



Corner Cleats for Smooth Corner Joints



Laminated and Double Glass for Heat and Noise Insulation



Limitless Colors and Textures



Green Metal & Endlessly Recyclable

## Why choose Totalis

### over untested windows?



#### Rigorously Tested & Certified

Totalis windows and doors undergo comprehensive testing for wind, water, and air parameters, matching global standards such as EN and ASTM.



#### Superior Strength & Durability

Crafted from premium-grade aluminium extrusions by Hindalco.



#### Exceptional Design

Our value-engineered products are meticulously designed to provide the best-in-class experience, ensuring both functionality and aesthetic appeal.



#### Mark of Authenticity

Totalis windows and doors are equipped with authenticity holograms, serving as a visible proof of their genuine quality and origin.



#### Effortless Operation

Factory-made and extensively tested for smooth and hassle-free operation.

## Why choose Totalis

### over Non-Aluminium Windows?



#### Unparalleled Strength

Manufactured from Hindalco's high-quality aluminium extrusions, providing unmatched strength as compared to other material windows.



#### Superior Performance and High Durability

Protection against diverse weather conditions like high winds, heavy rain, and extreme temperatures.



#### Sleek Aesthetics

Sleek and modern appearance, enhancing the overall aesthetics of your space.



#### Low Maintenance

Resistant to rust, corrosion, and termite infestations, eliminating the need for frequent painting or staining.



#### Environmentally Sustainable

Highly sustainable, since aluminium is an eternally recyclable material.



#### Versatile Design Options



Choose from a wide range of colors, finishes, and hardware choices, enabling you to create a unique and personalised look for your spaces.

# Sliding windows


## TOT-SD LITE




### Assembly

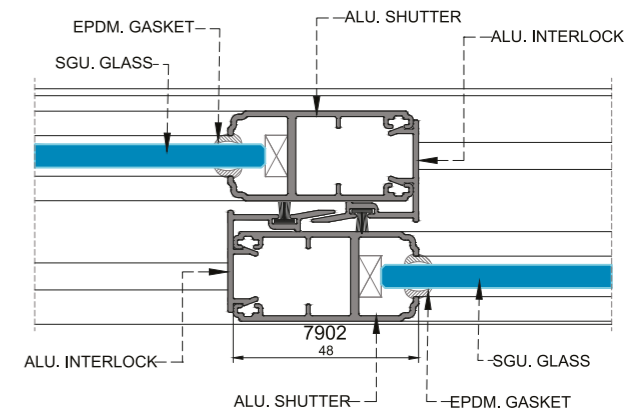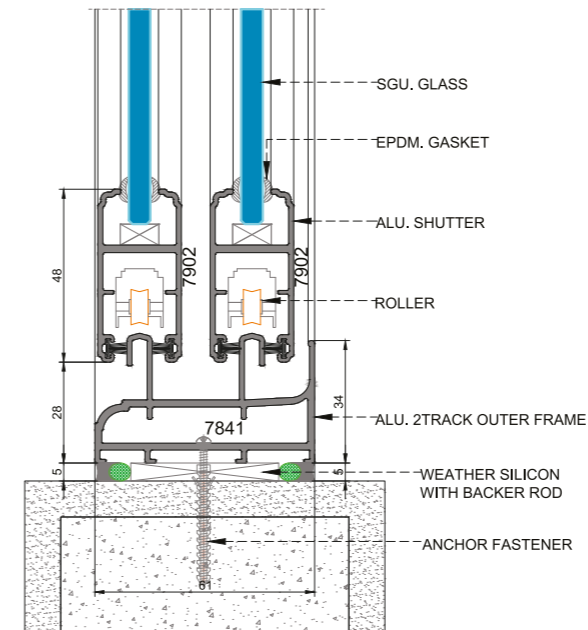


### Popular typologies

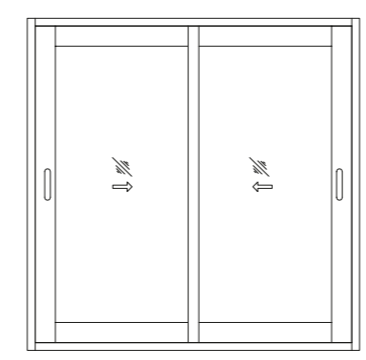

2T 2S

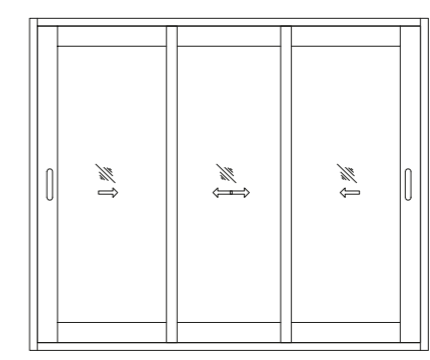

3T 3S

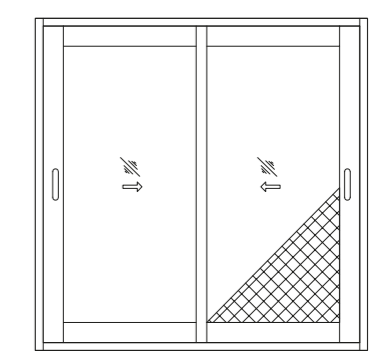

3T 2S + MESH



2T 4S



2T 2S + FIXED



2T 2S + FIXED

### Product Specifications (size)

- Max Sash Height (mm): 1500
- Max Sash Width (mm): 800
- Glass Range (mm): 4-6

### Performance Parameters


- Windload: 1.6 kpa  
as per class 4A (BS EN12210 : 2000)
- Air Tightness: 150 Pa  
as per class 2 (BS EN12207 : 2000)
- Water Tightness: 150 Pa  
as per Class 4A (BS EN12207 : 2000)

# Sliding windows


TOT-SD




## Assembly

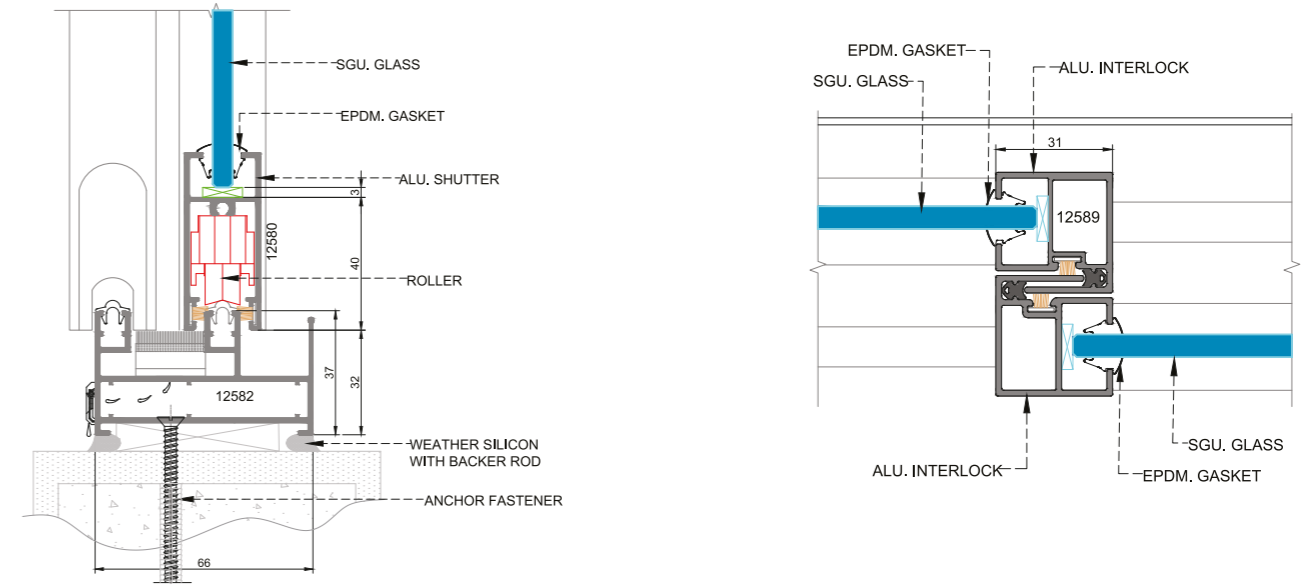


## Popular typologies




2T 2S

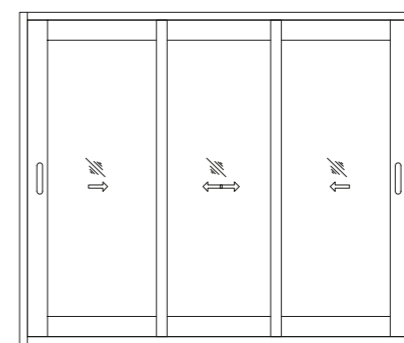

3T 3S

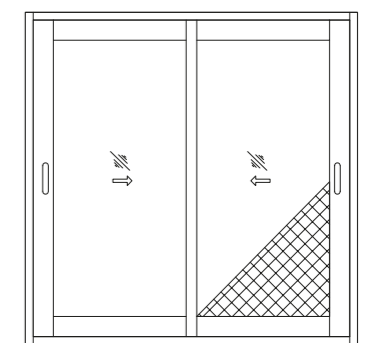


3T 2S + MESH

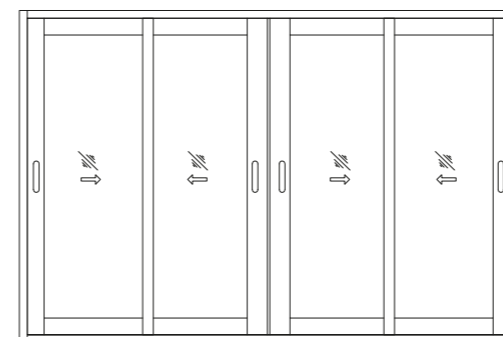

2T 4S



2T 2S + FIXED

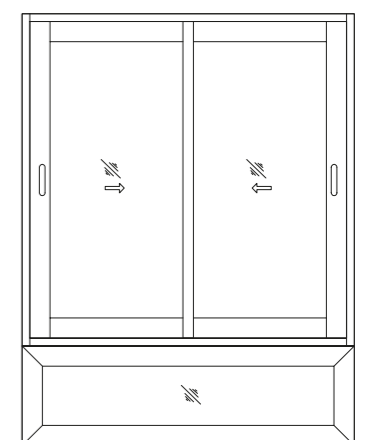

2T 2S + FIXED

### Product Specifications (size)

Max Sash Height (mm): 2100  
 Max Sash Width (mm): 1000  
 Glass Range (mm): 5, 6, 8

### Performance Parameters


Windload: 1.6 kpa  
 as per Class 4A (BS EN12210 : 2000)  
 Air Tightness: 150 Pa  
 as per class 2 (BS EN12207 : 2000)  
 Water Tightness: 150 Pa  
 as per Class 4A (BS EN12207 : 2000)

# Sliding windows


## TOT-SD PLUS




### Assembly

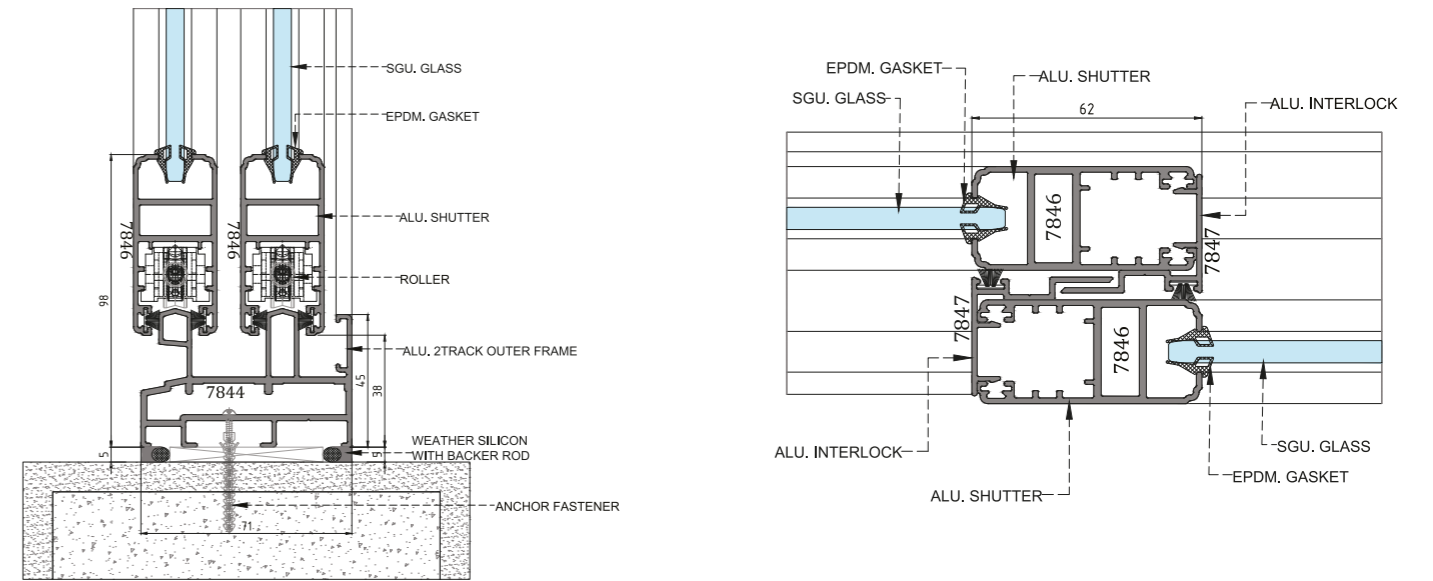


### Popular typologies




2T 2S

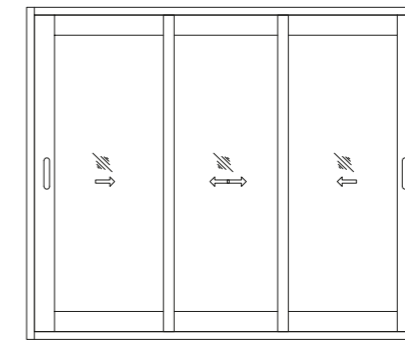


3T 3S

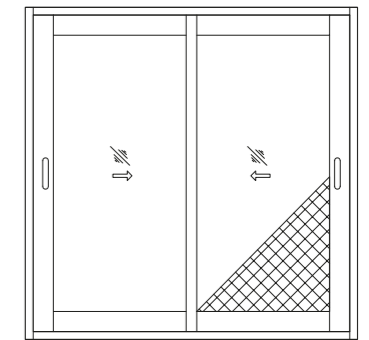

3T 2S + MESH

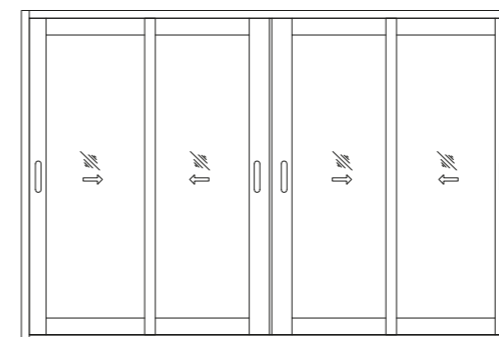

2T 4S

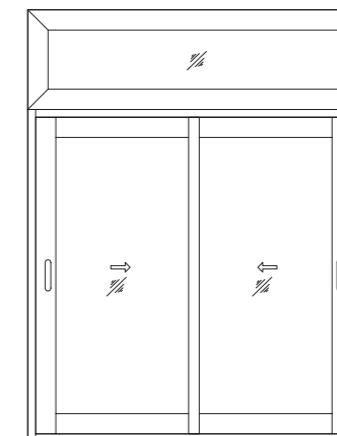

2T 2S + FIXED



2T 2S + FIXED

### Product Specifications (size)

Max Sash Height (mm): 2400

Max Sash Width (mm): 1200

Glass Range (mm): 5-20

### Performance Parameters


Windload: 2 kpa  
as per Class C5 (BS EN12210 : 2000)

Air Tightness: 300 Pa  
as per class 2 (BS EN12207 : 2000)

Water Tightness: 150 Pa  
as per class 4A (BS EN12207 : 2000)

# Sliding windows

## TOT-SD PRO

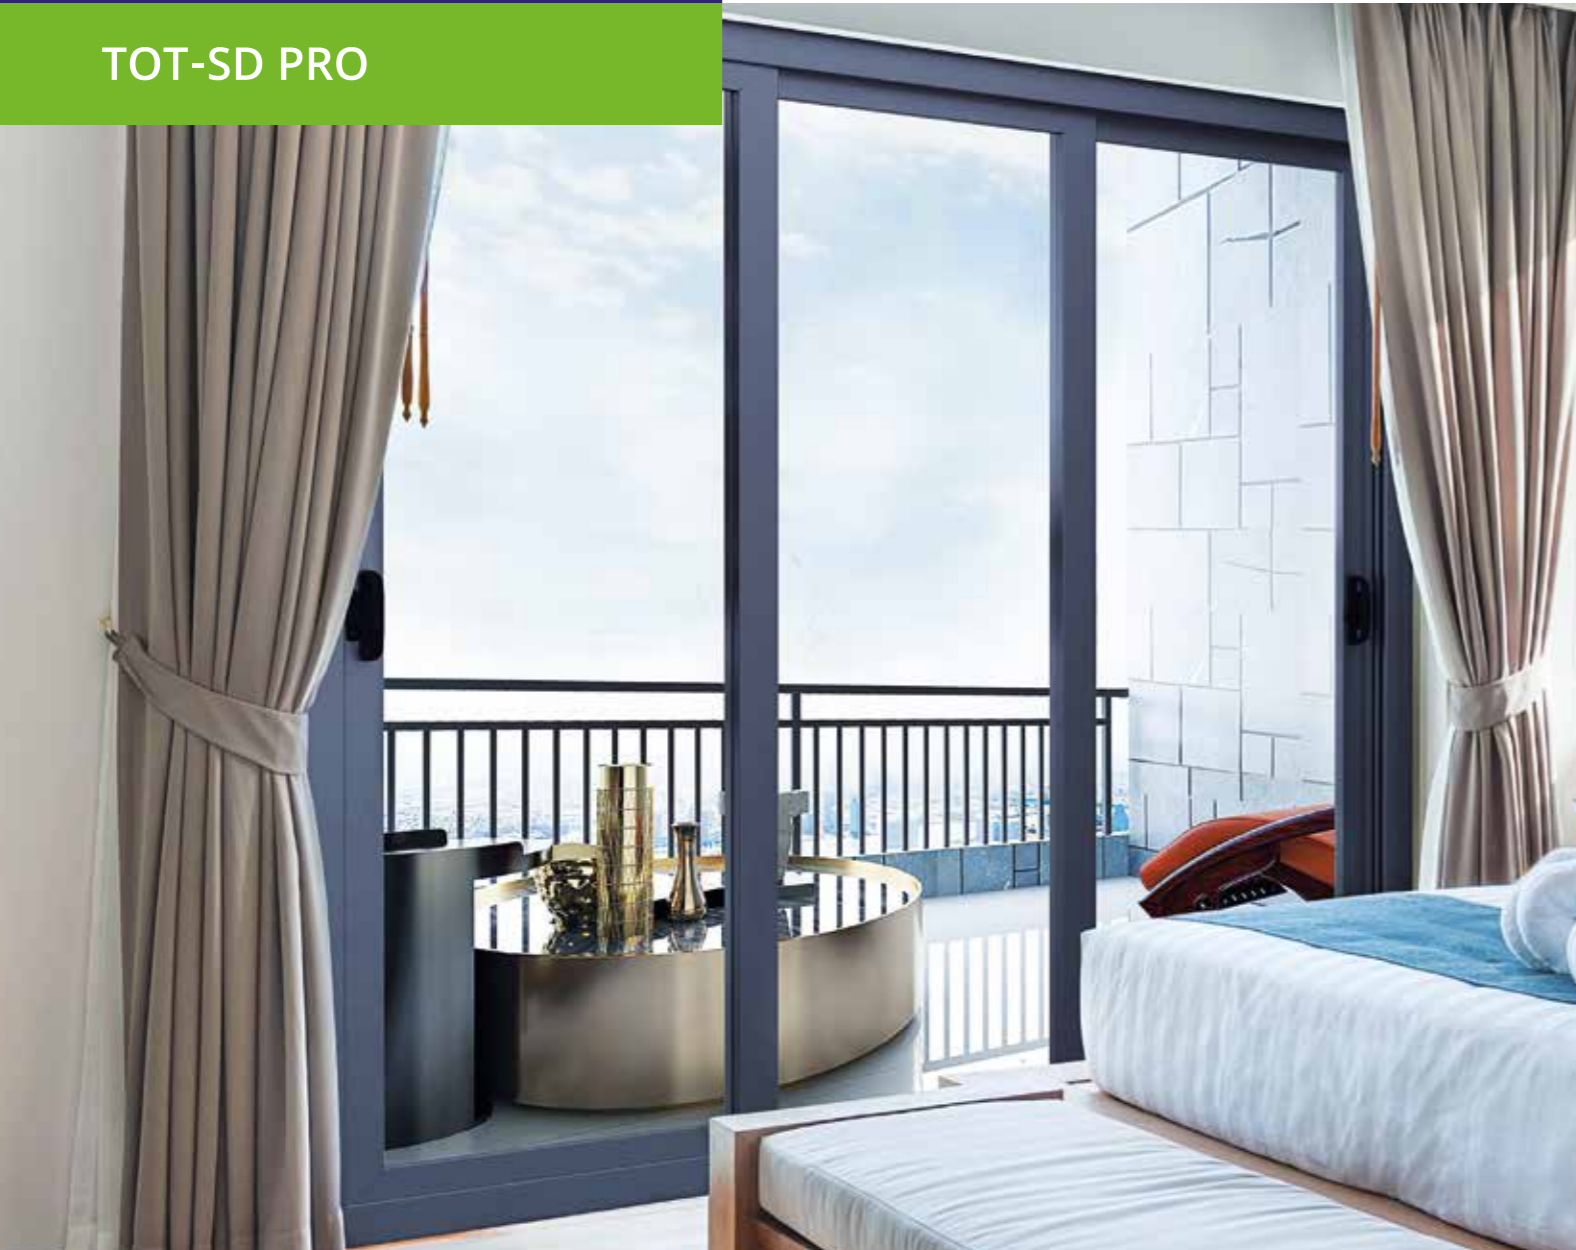

### Product Specifications (size)

Max Sash Height (mm): 2400

Max Sash Width (mm): 1500

Glass Range (mm): 5-24


### Performance Parameters

Windload: 2 kpa  
as per Class B5 (BS EN12210 : 2000)


Air Tightness: 500 Pa  
as per class 2 (BS EN12207 : 2000)

Water Tightness: 150 Pa  
as per class 5A (BS EN12207 : 2000)


## Assembly

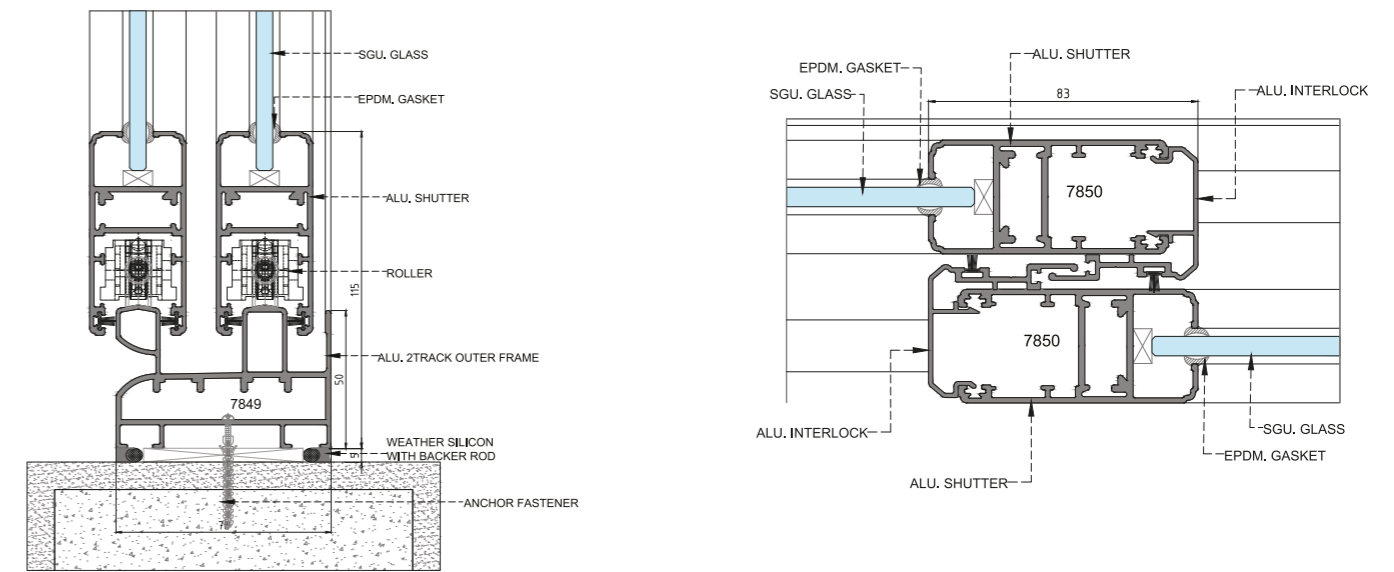


## Popular typologies




2T 2S

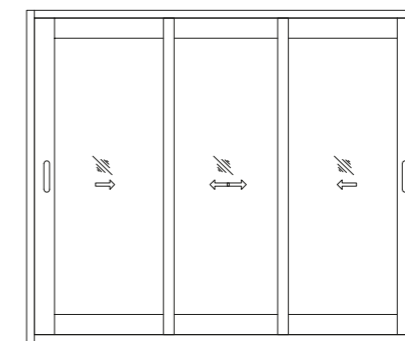


3T 3S

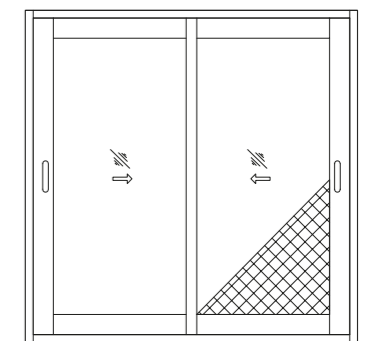

3T 2S + MESH

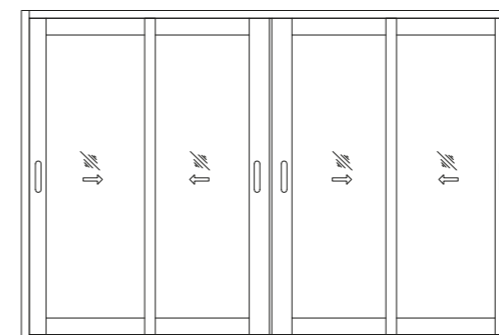

2T 4S

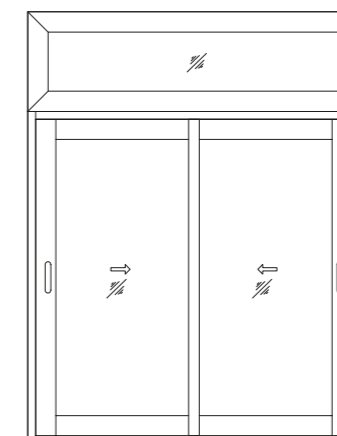


2T 2S + FIXED




2T 2S + FIXED

# Casement Series


TOT-CS

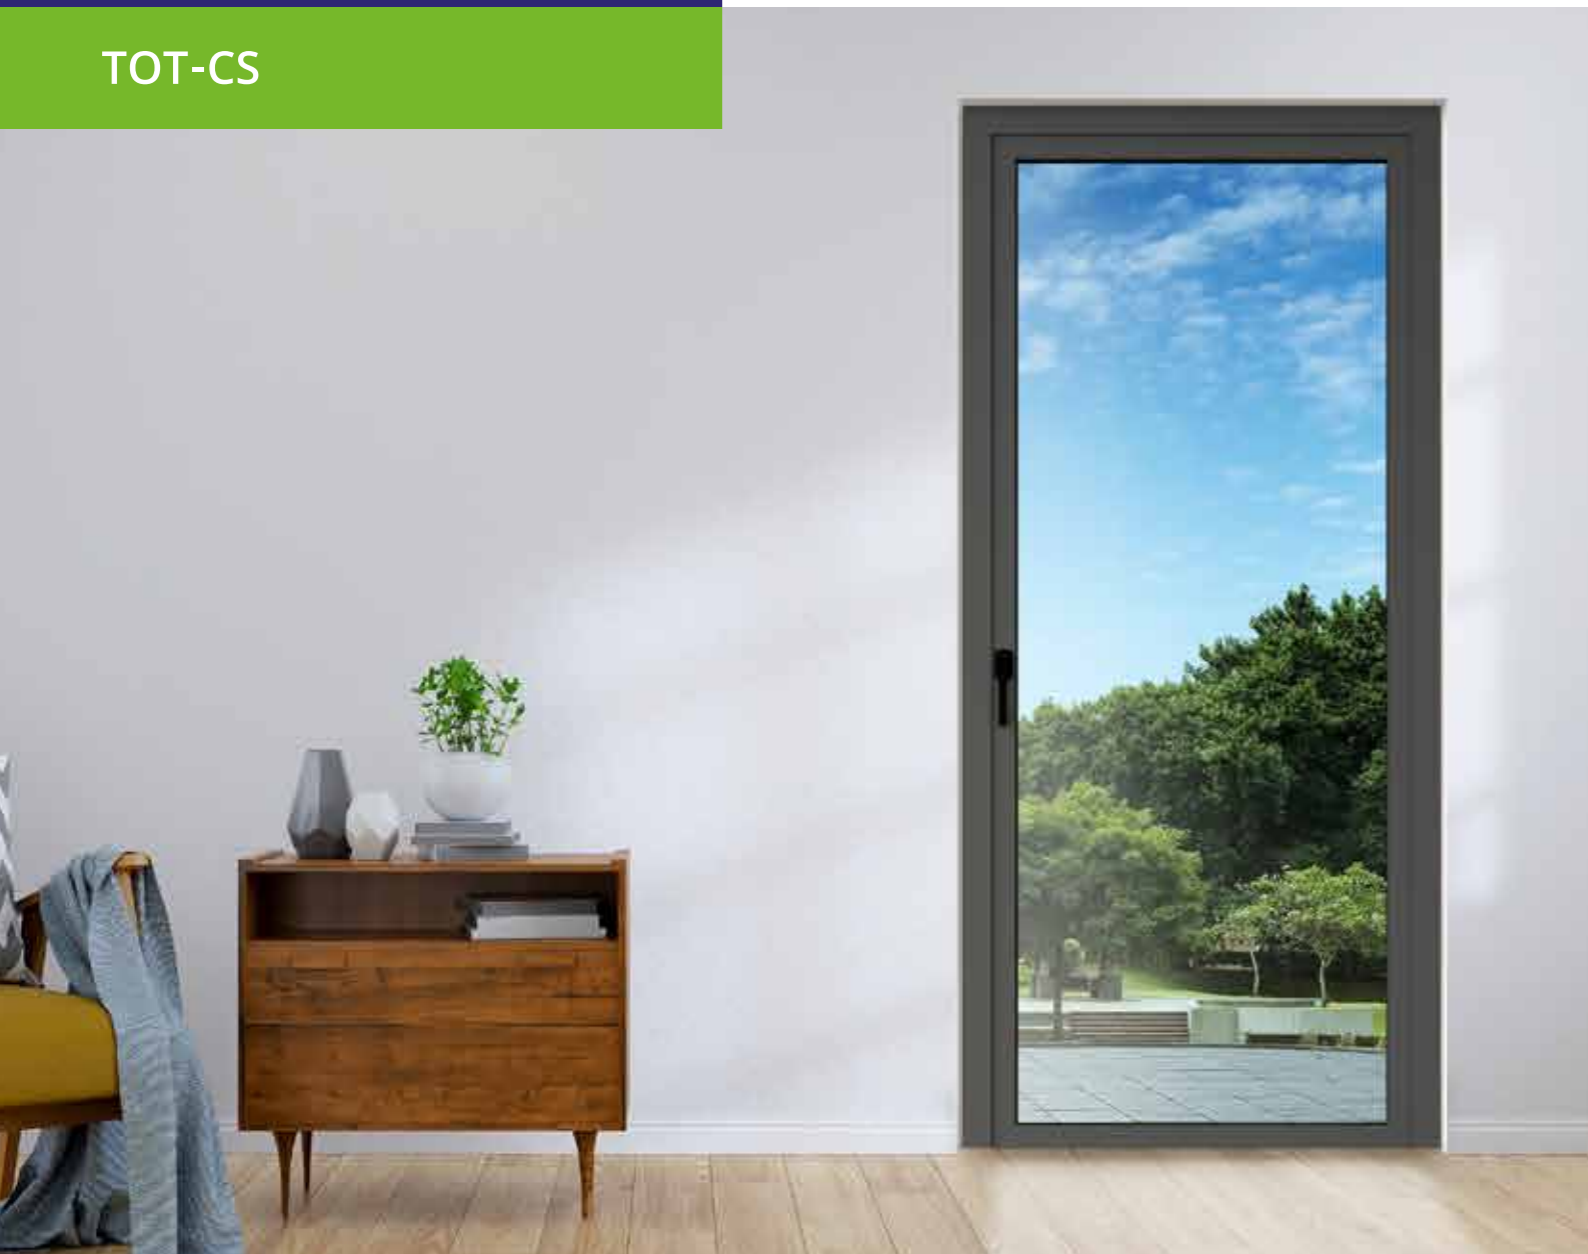


## Assembly

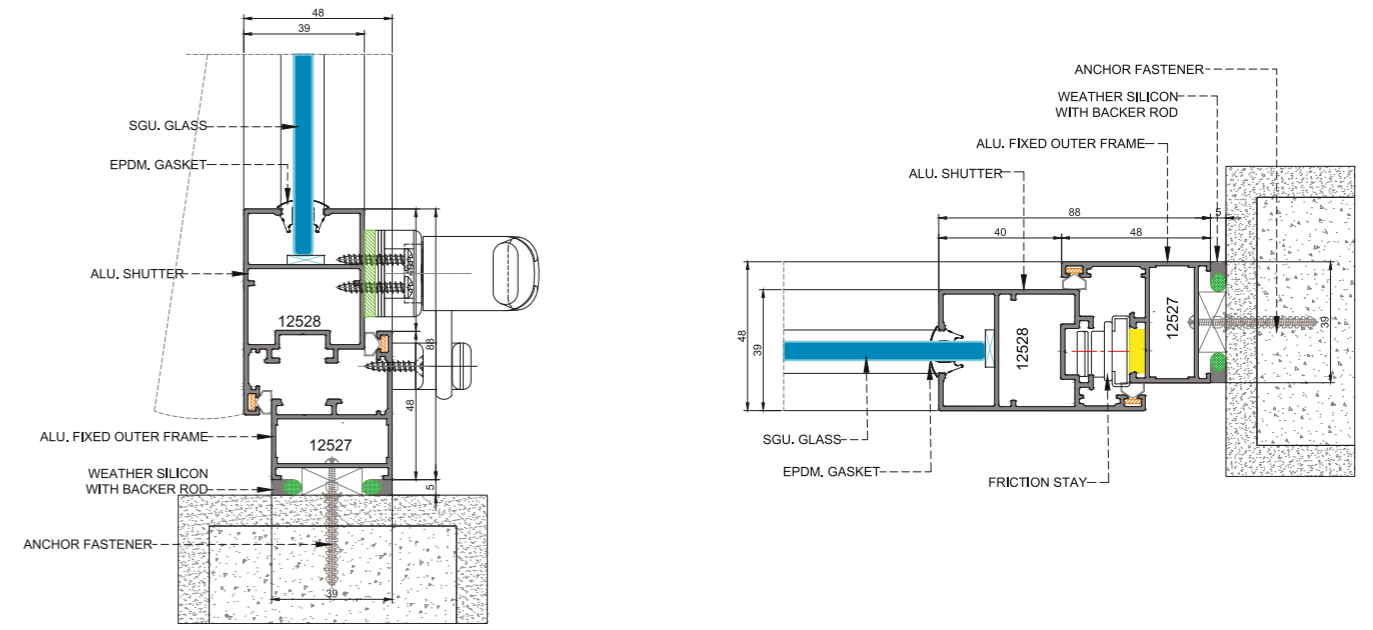

## Popular typologies

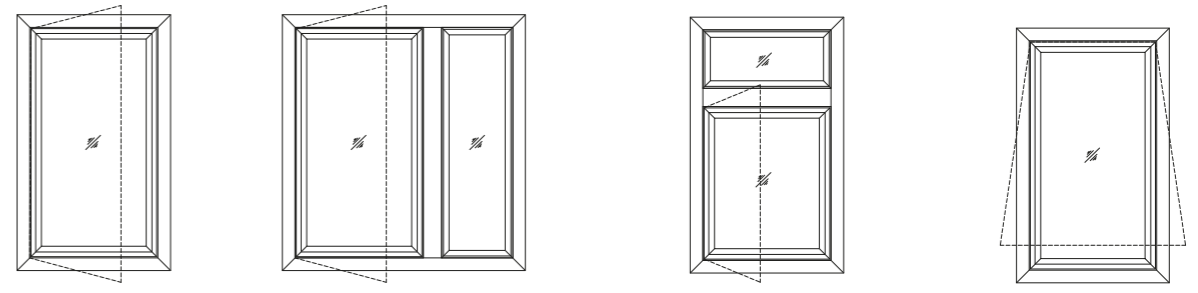

Side Hung      Fixed + Openable      Fixed + Openable      Top Hung

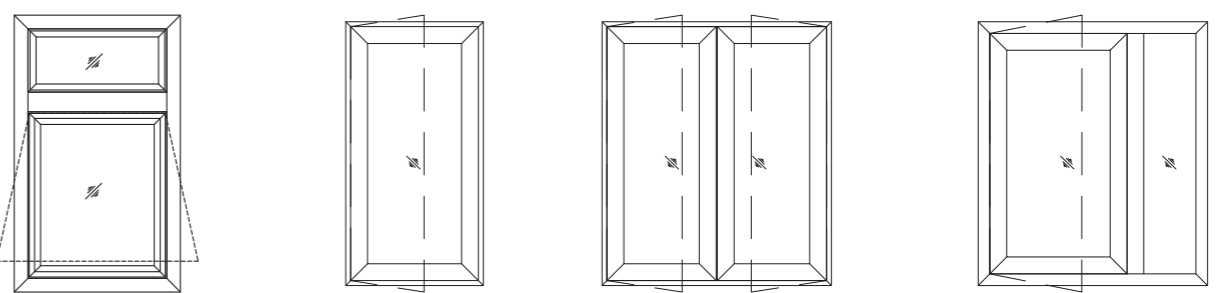

Top Hung + Fixed      Side Hung Door      French Door      Side Hung Door + Side Fix

### Product Specifications (size)

Max Sash Height (mm):  
 Door – 2400, Window – 1500  
 Max Sash Width (mm):  
 Door – 900, Window – 750  
 Glass Range (mm): 5 – 20

### Performance Parameters

Windload: 1.6 kpa  
 as per Class 4C (BS EN12210 : 2000)  
 Air Tightness: 150 Pa  
 as per class 2 (BS EN12207 : 2000)  
 Water Tightness: 150 Pa  
 as per Class 4A (BS EN12207 : 2000)





**MUMBAI OFFICE ADDRESS:**

B-03, Paragon Condomium, Building B-Ground floor,  
Pandurang Budhkar Road, Worli, Mumbai 400 013  
Tel: 022 6253 1313.

**DELHI OFFICE ADDRESS:**

310, World Trade Center,  
Near Lalit Hotel, Barakhamba Lane,  
Connaught Place, New Delhi 110 001  
Tel: 011 4109 9503

**E-MAIL:** [hil-totalis@adityabirla.com](mailto:hil-totalis@adityabirla.com)



**TOTALIS**

Tested hai. Trusted hai.